
# SENA



# SRLB MOTORCYCLE COMMUNICATION SYSTEM

FOR SHOEL COMLINK

SOUND BY

harman/kardon

## Downloadable Sena Software

Download the **Sena Motorcycles App** on **Google Play Store** or **App Store**.



## Sena Motorcycles

• Device Configuration Setting

Download the following items at **sena.com**.



## Sena Device Manager

- Firmware upgrade
- Device configuration setting




Quick Start Guide, User's Guide

Follow us on Facebook, YouTube, Twitter and Instagram to check the latest information and helpful tips.



## ■ Product Details

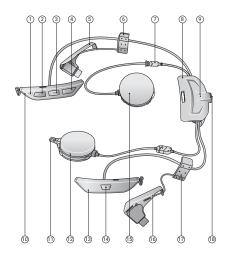

- ① Status LED
- ② (-) Button
- (3) Center Button
- 4 (+) Button
- ⑤ Antenna (L)
- 6 Clip (L)
- Speaker Connector
- 8 Battery Module
- 10 Button Module (L)


- 1 Microphone Connector
- Speaker (R)
- Button Module (R)
- (4) Mesh Intercom Button
- (b) Speaker (L)
- 6 Antenna (R)
- ① Clip (R)
- ® DC Power Charging & Firmware Upgrade Port

# Installation


The following **SHOEI helmets** are compatible with the **SRL3**.

• GT-Air 3, Neotec 3


Helmet and Module Cover

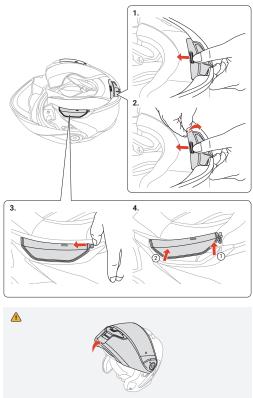


# **Inner Padding**




# **Battery Module**

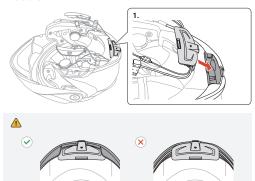


# Wired Boom Microphone

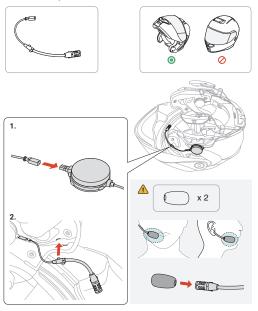


# Wired Microphone

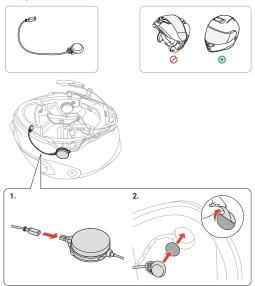


# Speakers

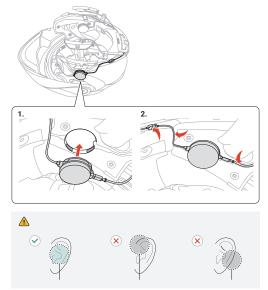

# Antenna, Clip, and Button Module

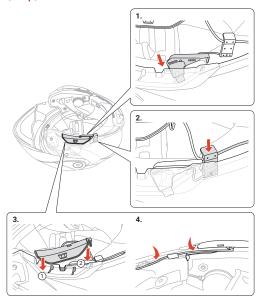

# Helmet and Inner Padding

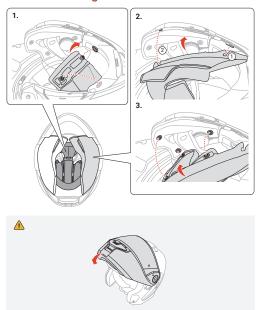

# Icon Legend



**Tap** button the specified number of times



**Press and Hold** button for the specified amount of time



"Hello"

Audible prompt

# Basic Operations

#### **Powering On**



#### **Powering Off**



## Volume Up



#### Volume Down



# **■ Checking the Battery Level**



# Phone Pairing



③ Select SRL3 in the list of Bluetooth devices detected.



- The headset will enter the Phone Pairing mode automatically when you initially turn on the headset.
- For more information on phone pairing, refer to the User's Guide.

# Using the Phone

#### Answer a Call



#### End a Call




## Reject a Call



# **■** Siri and Google Assistant

Activate the Siri or Google Assistant Installed on Your Phone









# Speed Dial

① Enter into the Speed Dial.



② Navigate between Speed Dial Preset numbers.



3 Call the Speed Dial Preset number.



**Note:** Before using speed dial, you need to assign the speed dial presets through the **Sena Device Manager** or the **Sena Motorcycles App**.

## Music Control

## Play/Pause



#### Track Forward



#### Track Backward



## ■ Mesh Intercom<sup>TM</sup>

Open Mesh™: communication within the same channel.

Group Mesh™: communication within the same private group.

• For more information on **Mesh Intercom**, refer to the User's Guide.


#### Mesh Intercom On





#### Mesh Intercom Off





Note: When Mesh Intercom is on, the SRL3 will automatically connect to nearby SRL3 users and the headset will be in Open Mesh (default: channel 1) initially.

# Open Mesh

### Channel Setting (Default: channel 1) in Open Mesh

① Enter into the **Channel Setting**.



2 Navigate between channels.

$$(1 \rightarrow 2 \rightarrow \bullet \bullet \bullet \rightarrow 8 \rightarrow 9 \rightarrow Exit \rightarrow 1 \rightarrow \bullet \bullet \bullet)$$



3 Save the channel.




**Note:** You can use the **Sena Motorcycles App** to change the channel.

# ■ Group Mesh

**Group Mesh** is a closed group intercom function that allows users to join, leave, or rejoin a group intercom conversation without pairing each headset

## 1) Creating a Group Mesh

Creating a Group Mesh requires two or more Open Mesh users.

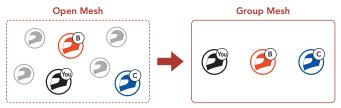

① Users (You, B, and C) enter into Mesh Grouping to create a Group Mesh.




When Mesh Grouping is completed, the users (You, B and C) will hear a voice prompt on their headsets as Open Mesh switches to Group Mesh.



## 2) Joining an Existing Group Mesh

One of the current users in an Existing Group Mesh can allow new users (one or more) in Open Mesh to join the Existing Group Mesh.

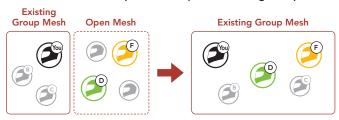

① One (You) of the current users in the Existing Group Mesh and new users (D and F) in Open Mesh enter into Mesh Grouping to join the Existing Group Mesh.



When Mesh Grouping is completed, the new users (D and F) will hear a voice prompt on their headsets as Open Mesh switches to Group Mesh.



# **■ Enable/Disable Mic (Default: Enable)**

Users can enable/disable the microphone when communicating in a **Mesh Intercom**.



# ■ Mesh Reach-Out Request

You (caller) can send a request message to turn on the Mesh Intercom to nearby friends who have it turned off.


- ① If you want to send or receive a request massage, you need to enable **Mesh Reach-Out** on the **Sena Motorcycles App**.
- While your headset's Mesh Intercom is on, you (caller) send a request message using the headset's Button or the Sena Motorcycles App.



③ Friends who receive the request message need to manually turn on their Mesh Intercom using the headset's Button or the Sena Motorcycles App.

## Reset Mesh

If the headset in an **Open Mesh** or **Group Mesh** resets the **Mesh**, it will automatically return to **Open Mesh (default: channel 1)**.



## Bluetooth Intercom

Up to three other people can be paired with the headset for Bluetooth intercom conversations.



#### Intercom Pairing

There are two ways to pair the headset.

#### Using the Smart Intercom Pairing (SIP)

**SIP** allows you to quickly pair with your friends for intercom communication by scanning the QR code on the **Sena Motorcycles App** without remembering the button operation.

- ① Pair the mobile phone with the headset.
- ② Open the Sena Motorcycles App and tap [-] (Smart Intercom Pairing Menu).
- 3 Scan the QR code displayed on your friend (B)'s mobile phone.
  - Your friend (B) can display the QR code on the mobile phone by tapping ¬> QR code (₩) on the Sena Motorcycles App.



- Tap Save and check that your friend (B) is paired with you (A) correctly.
- ⑤ Tap Scan (⑥) and repeat steps 3-4 to pair with Intercom Friends (C) and (D).

**Note:** The **Smart Intercom Pairing (SIP)** is not compatible with Sena products that use **Bluetooth 3.0** or **below**.

## **Using the Button**



① Users (You, B) enter into Intercom Pairing.



3 Repeat the steps above to pair with other headsets (C and D).

# **■ Last-Come, First-Served**

If the headset has multiple paired headsets for intercom conversations, the last paired headset is set as the **First Intercom Friend**.



# **■ Two-way Intercom**

Start/End Conversation with the First Intercom Friend D



Start/End Conversation with the Second Intercom Friend C



Start/End Conversation with the Third Intercom Friend B



## **■ FM Radio**

#### FM Radio On/Off



### Start/Stop Scanning



#### **Seek Forward**



#### Seek Backward



## **Navigating Preset Stations**




**Note:** You can also save the current station from the **Sena Motorcycles App**.

# **■** Configuration Menu

## Accessing the Configuration Menu



## **Navigating Between Menu Options**




## **Execute Menu Options**



# ■ Troubleshooting


#### **Fault Reset**



Pinhole Fault Reset Button


#### Note:

- Fault Reset will not restore the headset to factory default settings.
- The charging LED is not the **Pinhole Fault Reset Button**. Do not press it.




## **Factory Reset**







## Quick Reference

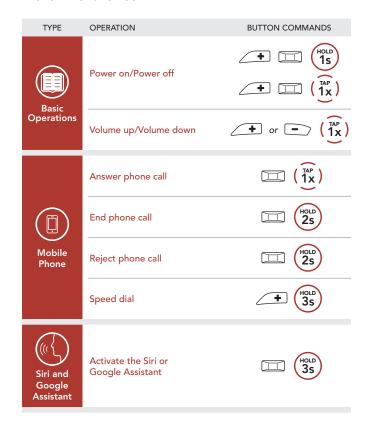

TYPE	OPERATION	BUTTON COMMANDS
Mesh Intercom™	Mesh Intercom on/off	$\square$ $(\widehat{1x})$
	Channel setting	$\square$ $(\widehat{\underbrace{2x}^{\text{TAP}}})$
	Mesh Grouping	HOLD 5s
	Enable/Disable Mic	HOLD 1S
	Mesh Reach-Out Request	$\square$ $(\widehat{3x})$
	Reset Mesh	HOLD 88S
(((o))) Intercom	Intercom pairing	HOLD 5s
	Start/End intercom	

TYPE	OPERATION	BUTTON COMMANDS
Music	Play/Pause music	Thold 1s
	Track forward	+ HOLD 1s
	Track backward	- HOLD 1s
FM Radio	FM radio on/off	HOLD 1s
	Select preset	Thold 1s
	Seek forward/backward	$\longrightarrow$ or $\bigcirc$ $(\underbrace{\underbrace{\underbrace{x}}_{x}}_{x})$
	Scan up FM band/ stop scanning	+ HOLD 1s